



KOMPACT TYPE 22

Other sizes are available* - special order only.

STANDARD PRODUCT RANGE

TYPE 22								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$		
				Watts	BTUs	Watts	BTUs	
D304K	400	6.79	1.28	420	1432	538	1834	
D306K	600	10.18	1.92	629	2148	806	2752	
D308K	800	13.58	2.56	839	2864	1075	3669	
D310K	1000	16.97	3.20	1049	3580	1344	4586	
D312K	1200	20.36	3.84	1259	4296	1613	5503	
D314K	1400	23.76	4.48	1469	5012	1882	6420	
D316K	1600	27.15	5.12	1679	5727	2150	7337	
D320K	2000	33.94	6.40	2098	7159	2688	9172	

300 Series
Height (h): 300mm

D404K	400	8.43	1.64	533	1819	683	2330
D405K	500	10.54	2.05	666	2273	854	2912
D406K	600	12.64	2.46	800	2728	1024	3495
D407K	700	14.75	2.87	933	3183	1195	4077
D408K	800	16.86	3.28	1066	3637	1366	4660
D409K	900	18.96	3.69	1199	4092	1536	5242
D410K	1000	21.07	4.10	1333	4547	1707	5825
D411K	1100	23.18	4.51	1466	5002	1878	6407
D412K	1200	25.28	4.92	1599	5456	2049	6990
D414K	1400	29.50	5.74	1866	6366	2390	8155
D416K	1600	33.71	6.56	2132	7275	2732	9320
D418K	1800	37.93	7.38	2399	8184	3070	10485
D420K	2000	42.14	8.20	2665	9094	3414	11650
D422K	2200	46.35	9.02	2932	10003	3756	12815

400 Series
Height (h): 400mm

D504K	400	10.42	2.00	638	2176	817	2787
D505K	500	13.03	2.50	797	2720	1021	3484
D506K	600	15.64	3.00	956	3263	1225	4181
D507K	700	18.24	3.50	1116	3807	1430	4878
D508K	800	20.85	4.00	1275	4351	1634	5574
D509K	900	23.45	4.50	1435	4895	1838	6271
D510K	1000	26.06	5.00	1594	5439	2042	6968
D511K	1100	28.67	5.50	1754	5983	2246	7665
D512K	1200	31.27	6.00	1913	6527	2451	8362
D513K	1300	33.88	6.50	2072	7071	2655	9058
D514K	1400	36.48	7.00	2232	7615	2859	9755
D515K	1500	39.09	7.50	2391	8159	3063	10452
D516K	1600	41.70	8.00	2551	8703	3268	11149
D518K	1800	46.91	9.00	2869	9790	3676	12542
D520K	2000	52.12	10.00	3188	10878	4084	13936
D522K	2200	57.33	11.00	3507	11966	4493	15330
D524K	2400	62.54	12.00	3826	13054	4901	16723

500 Series
Height (h): 500mm

TYPE 22								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$		
				Watts	BTUs	Watts	BTUs	
D604K	400	12.55	2.36	734	2504	940	3208	
D605K	500	15.69	2.95	917	3130	1175	4010	
D606K	600	18.82	3.54	1101	3756	1410	4812	
D607K	700	21.96	4.13	1284	4382	1645	5614	
D608K	800	25.10	4.72	1468	5008	1880	6416	
D609K	900	28.23	5.31	1651	5634	2115	7218	
D610K	1000	31.37	5.90	1835	6260	2350	8020	
D611K	1100	34.51	6.49	2018	6886	2585	8822	
D612K	1200	37.64	7.08	2202	7512	2820	9624	
D613K	1300	40.78	7.67	2385	8138	3056	10425	
D614K	1400	43.92	8.26	2569	8764	3291	11227	
D615K	1500	47.06	8.85	2752	9390	3526	12029	
D616K	1600	50.19	9.44	2935	10016	3761	12831	
D618K	1800	56.47	10.62	3302	11268	4231	14435	
D620K	2000	62.74	11.80	3669	12520	4701	16039	
D622K	2200	69.01	12.98	4036	13772	5171	17643	
D624K	2400	75.29	14.16	4404	15024	5640	19248	
D627K	2700	84.70	15.93	4954	16902	6346	21653	
D630K	3000	94.11	17.70	5504	18780	7051	24059	

600 Series
Height (h): 600mm

D704K	400	16.80	2.70	830	2832	1063	3628
D705K	500	21.00	3.38	1038	3540	1329	4536
D706K	600	25.20	4.05	1245	4248	1595	5443
D708K	800	33.60	5.40	1660	5665	2127	7257
D710K	1000	42.00	6.75	2075	7081	2659	9071
D712K	1200	50.40	8.10	2490	8497	3190	10885
D714K	1400	58.80	9.45	2905	9913	3722	12700
D716K	1600	67.20	10.80	3320	11329	4254	14514

750 Series
Height (h): 750mm


D904K	400	18.92	3.04	908	3344	1255	4284
D905K	500	23.65	3.80	1225	4180	1569	5355
D906K	600	28.38	4.56	1470	5016	1883	6426
D907K	700	33.11	5.32	1715	5852	2197	7496
D908K	800	37.84	6.08	1960	6688	2511	8567
D909K	900	42.57	6.84	2205	7523	2825	9638
D910K	1000	47.30	7.60	2450	8359	3139	10709
D911K	1100	52.03	8.36	2695	9195	3453	11780
D912K	1200	56.76	9.12	2940	10031	3766	12851

900 Series
Height (h): 900mm

Heat output $\Delta T50^\circ\text{C}$ = mean water temperature of 70°C and room temperature of 20°C .
Heat output $\Delta T60^\circ\text{C}$ = mean water temperature of 80°C and room temperature 20°C .

*Other sizes are available in 100mm increments - special order only.

FITTING DIMENSIONS

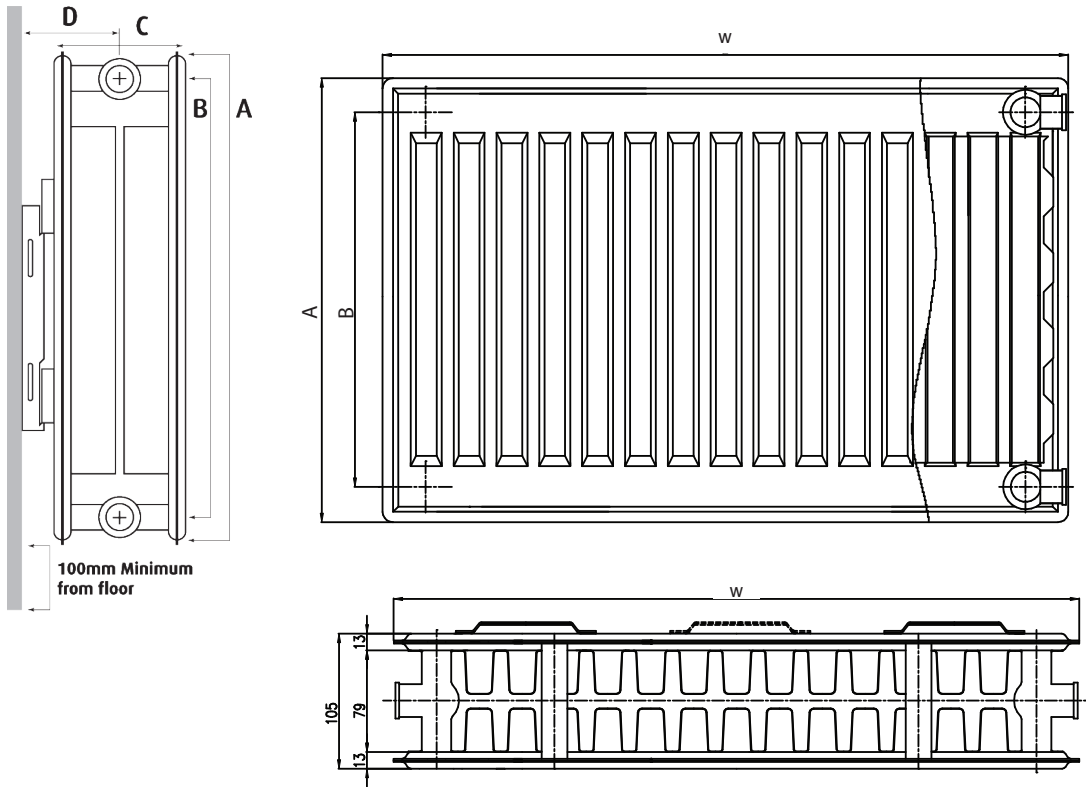

Nominal Size (mm) (A)	Centre Distance (mm) (B)	Width (mm) (C)	Wall to Centre (mm) (D)
300	245	105	82.5 or 97.5
400	345	105	82.5 or 97.5
500	445	105	82.5 or 97.5
600	545	105	82.5 or 97.5
750	695	105	82.5 or 97.5
900	845	105	82.5 or 97.5

K-RAD BRACKET DETAILS

